N-Channel 60-V (D-S) MOSFET

Key Features:

- Low r_{DS(on)} trench technology
- · Low thermal impedance
- · Fast switching speed


Typical Applications:

- Automotive Systems
- DC/DC Conversion Circuits
- Battery Powered Power Tools

PRODUCT SUMMARY				
V _{DS} (V)	$r_{DS(on)}(m\Omega)$	I⊳(A)		
60	$3 @ V_{GS} = 10V$	90 ^a		
60	$3.3 @ V_{GS} = 5.5V$	90		







ABSOLUTE MAXIMUM RATINGS ($T_A = 25^{\circ}$ C UNLESS OTHERWISE NOTED)							
Parameter			Limit	Units			
Drain-Source Voltage			60	V			
Gate-Source Voltage			±20	V			
Continuous Drain Current a	T _C =25°C	I _D	90	Α			
Pulsed Drain Current ^b		I _{DM}	360	Α			
Continuous Source Current (Diode Conduction) ^a	T _C =25°C	I _S	90	Α			
Power Dissipation ^a	T _C =25°C	P_{D}	300	W			
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55 to 175	°C			

THERMAL RESISTANCE RATINGS						
Parameter	Symbol	Maximum	Units			
Maximum Junction-to-Ambient °	$R_{\theta JA}$	62.5	°C/W			
Maximum Junction-to-Case	$R_{\theta JC}$	0.5	C/VV			

1

Notes

- a. Package Limited
- b. Pulse width limited by maximum junction temperature
- c. Surface Mounted on 1" x 1" FR4 Board.

Electrical Characteristics


Parameter	Symbol	Test Conditions	Min	Тур	Max	Unit		
Static								
Gate-Source Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}$, $I_D = 250 \text{ uA}$	1			V		
Gate-Body Leakage	I _{GSS}	$V_{DS} = 0 \text{ V}, V_{GS} = \pm 20 \text{ V}$			±100	nA		
Zero Gate Voltage Drain Current		$V_{DS} = 48 \text{ V}, V_{GS} = 0 \text{ V}$			1 uA			
Zero Gate Voltage Brain Gurrent	I _{DSS}	$V_{DS} = 48 \text{ V}, V_{GS} = 0 \text{ V}, T_{J} = 55^{\circ}\text{C}$			10	u/\		
On-State Drain Current ^a	$I_{D(on)}$	$V_{DS} = 5 \text{ V}, V_{GS} = 10 \text{ V}$	110			Α		
Drain Source On Besistance a	r	$V_{GS} = 10 \text{ V}, I_{D} = 20 \text{ A}$			3	mΩ		
Drain-Source On-Resistance ^a	r _{DS(on)}	$V_{GS} = 5.5 \text{ V}, I_D = 16 \text{ A}$			3.3	11122		
Forward Transconductance ^a	g _{fs}	$V_{DS} = 15 \text{ V}, I_{D} = 20 \text{ A}$		15		S		
Diode Forward Voltage ^a	V_{SD}	$I_{S} = 45 \text{ A}, V_{GS} = 0 \text{ V}$		0.85		V		
		Dynamic ^b						
Total Gate Charge	Q_g	$V_{DS} = 30 \text{ V}, V_{GS} = 5.5 \text{ V},$		162		nC		
Gate-Source Charge	Q_{gs}	$I_{D} = 20 \text{ A}$		57				
Gate-Drain Charge	Q_gd	1D = 20 A		81				
Turn-On Delay Time	t _{d(on)}	$V_{DS} = 30 \text{ V}, R_1 = 1.5 \Omega,$		63				
Rise Time	t _r	$V_{DS} = 30 \text{ V}, N_L - 1.3 \Omega,$ $I_D = 20 \text{ A},$		112		ns		
Turn-Off Delay Time	$t_{d(off)}$	$V_{GEN} = 10 \text{ V}, R_{GEN} = 6 \Omega$		276				
Fall Time	t _f	V GEN = 10 V, 1 (GEN = 0.12		85				
Input Capacitance	C _{iss}			33060				
Output Capacitance	C _{oss}	$V_{DS} = 15 \text{ V}, V_{GS} = 0 \text{ V}, f = 1 \text{ Mhz}$		1180		pF		
Reverse Transfer Capacitance	C_{rss}			1135				

Notes


- a. Pulse test: PW <= 300us duty cycle <= 2%.
- b. Guaranteed by design, not subject to production testing.

Analog Power (APL) reserves the right to make changes without further notice to any products herein. APL makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does APL assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in APL data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. APL does not convey any license under its patent rights nor the rights of others. APL products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the APL product could create a situation where personal injury or death may occur. Should Buyer purchase or use APL products for any such unintended or unauthorized application, Buyer shall indemnify and hold APL and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that APL was negligent regarding the design or manufacture of the part. APL is an Equal Opportunity/Affirmative Action Employer.


Typical Electrical Characteristics



1. On-Resistance vs. Drain Current



3. On-Resistance vs. Gate-to-Source Voltage



100

TJ = 25°C

80

(4)

tue
40

20

0

20

0


24

66


8

VGS - Gate-to-Source Voltage (V)

2. Transfer Characteristics




4. Drain-to-Source Forward Voltage




6. Capacitance


Typical Electrical Characteristics




7. Gate Charge




9. Safe Operating Area



TJ -JunctionTemperature(°C)
8. Normalized On-Resistance Vs





10. Single Pulse Maximum Power Dissipation

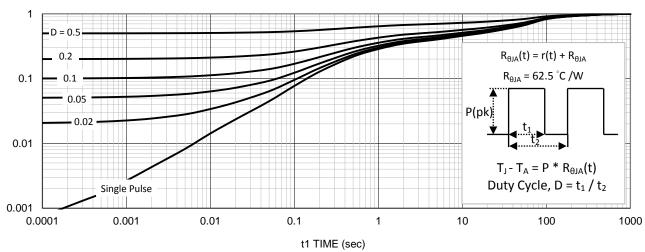

11. Normalized Thermal Transient Junction to Ambient

Package Information

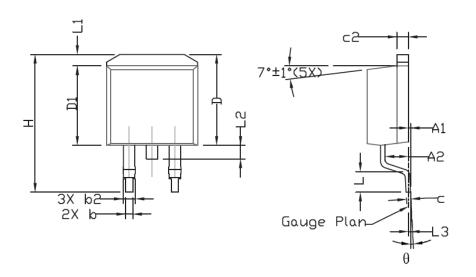



CVMDEI	DIMENS:	IONAL F	REQMTS	INCHES REQMTS				
SYMBOL	MIN	NDM	MAX	MIN	NDM	MAX		
A	4,30	4.57	4,72	0.169	0.180	0.186		
A1	0		0,25	0		0.010		
A2	2,47	2.57	2,67	0.097	0.101	0.105		
b	0.69	0,813	0.94	0.027	0.032	0.037		
b2	1.17	1.27	1.45	0.046	0.050	0.057		
_	0.48	0,50	0.60	0.019	0.020	0.024		
c2	1.17	1.27	1.37	0.046	0,050	0,054		
D	9,80	10.05	10.30	0.386	0,396	0.406		
D1	8,64	8.78	9,65	0,340	0,346	0,380		
D2	7.12	7.37	7,62	0.280	0,290	0,300		
E	9,70	10.15	10.54	0,382	0,400	0.415		
E1	8,00	8,20	8,40	0,315	0,323	0.331		
е	2.54 BSC			0.	0.100 BSC			
Н	14,99	15,24	15,49	0.590	0.600	0.610		
L	1,78	2.29	2.79	0.070	0.090	0.110		
L1	1.02	1.27	1.52	0.040	0.050	0,060		
			1.75			0.069		
L3		0,254			0.010			
θ	0.		8*	0°		8*		